arXiv:1210.6710v2 [cond-mat.mtrl-sci] 31 Oct 2012

Ab Initio Study on Elastic Properties of Functionalized Carbon Nanotubes

Karolina Z. Milowska and Jacek A. Majewski
Institute of Theoretical Physics, Faculty of Physics,
University of Warsaw, ul. Hoza 69,
PL-00-681 Warszawa, Poland

(Dated: November 1, 2012)

In this study, we present the effects of functionalization of single carbon nanotubes (CNT) with simple organic molecules $-NH$, $-NH_2$, $-CH_2$, $-CH_3$, $-OH$, $-COOH$ and both $-COOH$, $-OH$, analyzing elastic properties of the structures. We have performed DFT calculations for CNT with various densities of the attached molecules. We have determined the changes in the geometry, the Young's modulus, Shear modulus and Bulk modulus and Poisson's ratio as a function of the density of the adsorbed molecules. For better comparing with some experimental works we have calculated percentage change of those quantities due to pristine CNT. Increasing number of covalently bound groups to the lateral surface of CNT decrease Young's modulus, Shear modulus and Bulk modulus. The biggest relative diffrences for each of those quantities, for 12,5% concentration, are ca. 30% for structures functionalized with $-CH_2$. For $-NH$ it is similar, in contrast to Shear modulus where reduction is smaller and around 15 %. For remaining structures, we have noted 20 % reduction in Young's and Bulk modulus, and 10 % in Shear modulus. Whereas Poisson's ratio is little changed in order to pristine CNTs.

PACS numbers: 31.15.A-, 31.15.ae, 31.15.E-, 31.15.ec, 61.46.-w, 61.46.Fg, 61.48.De, 81.05.U-, 81.07.De

I. INTRODUCTION

Remarkable electronic, mechanical and thermal properties of CNTs have been developed rapidly since CNT was discovered in 1991 by Iijima[1]. New composite materials made by adding CNT to various materials such as alloys, polymers, and metals are expected to enhance their properties, such as mechanical strength, electrical and thermal conductivity, and chemical stability[2,3]. However, pristine CNTs are not soluble in water or in organic solvents and have tendencies to create bundles. This drastically limits its use in industrial applications like nano-composites. Only simple organic molecules (such as CH$_n$, NH$_n$ fragments, OH, COOH groups) adsorbed at the surface of CNTs allow for strong binding of the functionalized in such a way CNTs with matrix material, typically a polymer or a metal[3–7]. This is the possible answer for problems with dispersion of CNTs and their interaction with matrix.

From the other point of view, functionalization to the side wall of CNTs introduce changes in structure, and defects[8–10], which could decrease the strenght of the structure due to pristine CNT. Having into consideration other possibly applications for functionalized CNTs, for instance in microeletronics or medicine, it is crucial to anlyzed elastic properties of those structures. Comparing the extensive amount of works of elastic properties of pristine CNTs with few papers concerning functionalized CNTs there is a need to study and predict the influence of functionalization on CNTs.

In this study, we have analized the effects of functionalization of single wall (9,0), (10,0) and (11,0) CNTs (SWNTs) with simple organic fragments CHn, NHn, OH, and COOH, focusing on their Young's, Shear and Bulk modulus.

(color online)

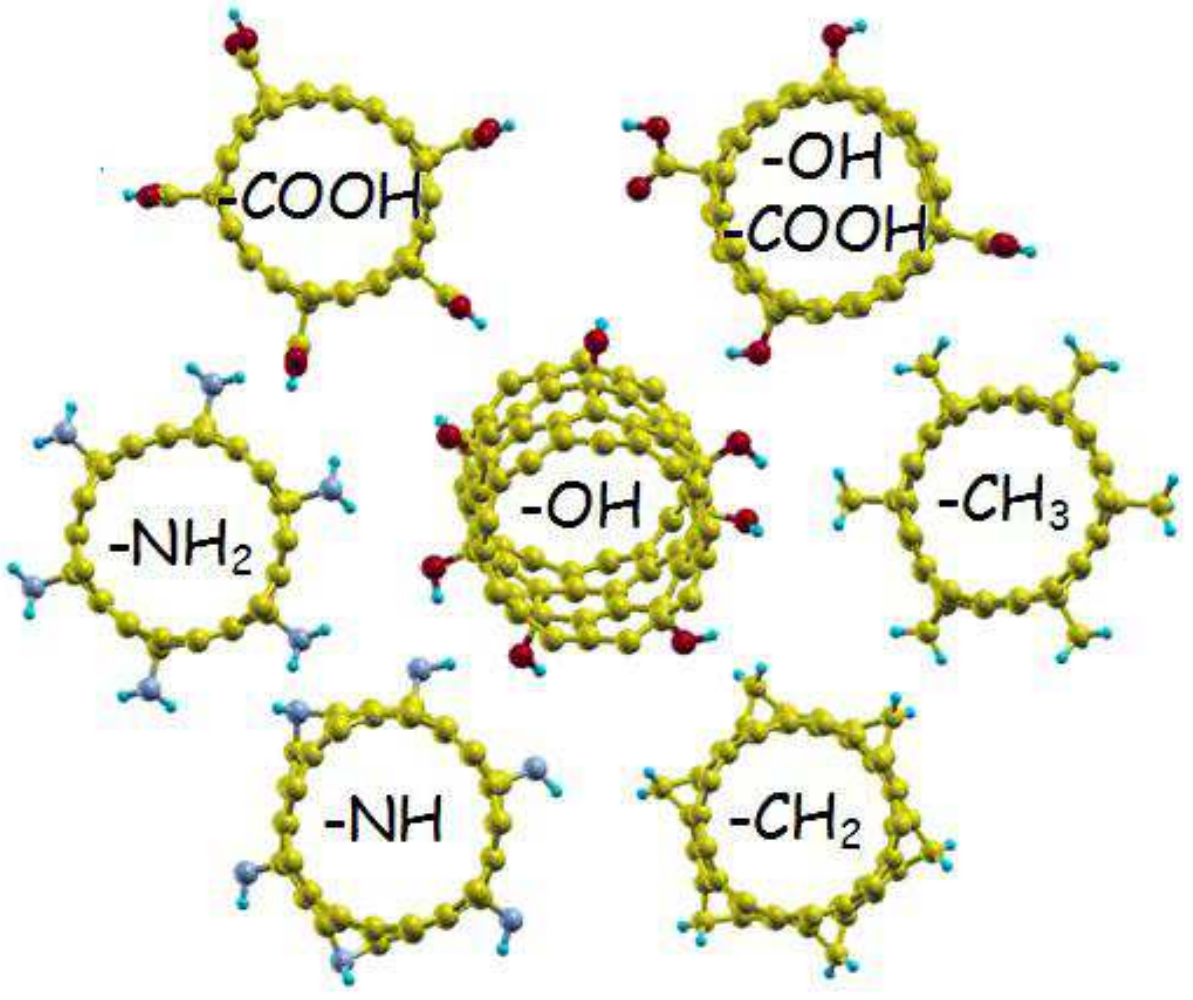

FIG. 1. Example structures of funtionalized CNT with simple (-NH, -NH$_2$, -CH$_2$, -CH$_3$, -COOH, -OH, -OH and -COOH) organic fragments after fully optimization.

II. CALCULATION DETAILS

We have analyzed elastic properties of three types of CNT: (9,0), (10,0) and (11,0). All of CNT have been covalently functionalized, up to 12.5 % concentration, by attaching to their lateral surface simple organic fragments such as $-NH$, $-NH_2$, $-CH_2$, $-CH_3$, $-OH$, $-COOH$ and both $-COOH$, $-OH$ (Fig. 1).

The total energies and components of stress tensor are obtained from the *ab initio* calculations in the framework of the density functional theory[11,12]. Stability studies including analysis of binding and adsorption energies due to number of attachments and radius of CNTs were presented in our previous published works[8–10]. Therefore here we have decided to show only adsorption energy per molecule, called also packing energy by Coto[13].

$$E_{ads} = \frac{1}{N}(E_{CNT+groups} - (E_{CNT} + N \cdot E_{group})). \quad (1)$$

We use the generalized gradient approximation (GGA) for the exchange-correlation density functional[14] and supercell geometry within the numerical package SIESTA[15,16]. A kinetic energy cut-off (parameter MeshCutoff in the SIESTA code) of 300 Ry and split double zeta basis set with spin polarization have been used in all calculations. Each supercell contains two primitive unit cells. The lateral separation (i.e., lateral lattice constants in the direction perpendicular to the symmetry axis) has been set to 30 Å, just to eliminate completely the spurious interaction between neighboring cells.

The lattice constant along the symmetry axis of the tube has been also optimized. The positions of all atoms in the supercell have been optimized to get vanishing forces on atoms. This provides us also with the Poisson ratio values, which has been calculated using following equation:

$$\nu = -\frac{\Delta r}{r}\frac{l}{\Delta l}, \quad (2)$$

where Δr is change of radius in strained nanotube.

The most interesting quantity, Young's modulus, have been determined in two ways: (i) - by comparing the total energy of unstressed (E_l) and stressed ($E_{l+\Delta l}$) systems, applying the tensile stress along the symmetry axis of CNTs:

$$\begin{aligned} Y &= \frac{1}{V_o}\frac{\partial^2 E_{strain}}{\partial \varepsilon_{ii}^2}, \\ E_{strain} &= E_{l+\Delta l} - E_l, \\ \varepsilon_{ii} &= \frac{\Delta l}{l}, \end{aligned} \quad (3)$$

where l is a lattice constant along the axis of the tube, Δl is elongation in the chosen direction, and V_o is volume of unstressed system; and (ii) - from components (σ_{ii}) of the stress tensor:

$$Y = \frac{\sigma_{ii}}{\varepsilon_{ii}} \quad (4)$$

Volume of the pure CNT has been calculated using following equation:

$$V_o = 2 \cdot \pi \cdot r \cdot l \cdot t, \quad (5)$$

where thickness t has been chosen as double Van der Waals radius of C atom (0.34 nm)[17–22] and r being nanotube's radius calculated as geometrical average of carbon atom positions on the CNT surface. In case of functionalized CNT we have neglected volume of attached molecules.

Bulk modulus (Eq. 6) and Shear modulus (Eq. 7) have been also calculated according to the formulas:

$$K = \frac{Y}{3(1-2\nu)}, \quad (6)$$

$$G = \frac{Y}{2(1+\nu)}, \quad (7)$$

III. RESULTS AND DISCUSSION

A. Influence of functionalization on the structure

In previous works[8–10] we have shown how functionalization with simple molecules influences structural and electronic properties of CNT. Therefore, in this paper, we present only the strenght of covalent binding beetwen CNT and its attachements, which is described in term of adsorption energy per molecule. This is the amount of energy which is necessery for attachment of each regarded fragment to lateral surface of CNT. Adsorption energy per molecule, which is shown in Fig. 2, allows to distinguish between radicals (-NH and -CH_2) and non-radicals (-NH_2, -CH_3, -COOH and -OH,). All of the fragments induce rehybridization from sp^2 to sp^3 of C-C bonds in neighbourhood of attachemnt, but some of them also cause other deformation of structure. Stronger covalent binding which means lower adsorption energy per molecule leads to more changes in structure.

We have compared in Fig. 3 two types of fragments: -OH groups nad -CH_2 radicals. On the contrary to hydroxyl group, which leave CNT structure almost uchanged, -CH_2 for some concentration could destroy whole CNT. Adsorption energy per molecule for radicals, like -CH_2, which are stronger bound to the lateral surface of CNT then -OH groups are almost indepedent of diameter of the tube. This quantity, for radicals, is slightly increasing with increasing density of attached molecules. For other non-radical attachments adsorption energy per molecule is maintained on the same level for all of regarded concentrations.

Functionalization has not only local influence on structure of CNT, but is also global. Radius of CNT rapidly changes even for small concentration of radicals attached to the lateral surface (Fig. 4). For example, radius of pure (9,0) CNT equals 3.592 $\mathring{A}$ and for CNT with 9 -CH_2 - 3.715 $\mathring{A}$, which means 3.31% change. For other groups we have also observed an increasing trend in comparision to the pure case. Percentage change for -CH_3 is 0.92 %, approximately 3.6 times smaller than for -CH_2. Radius of CNT, likewise adsorption energy per molecule, varies with the strenght of binding.

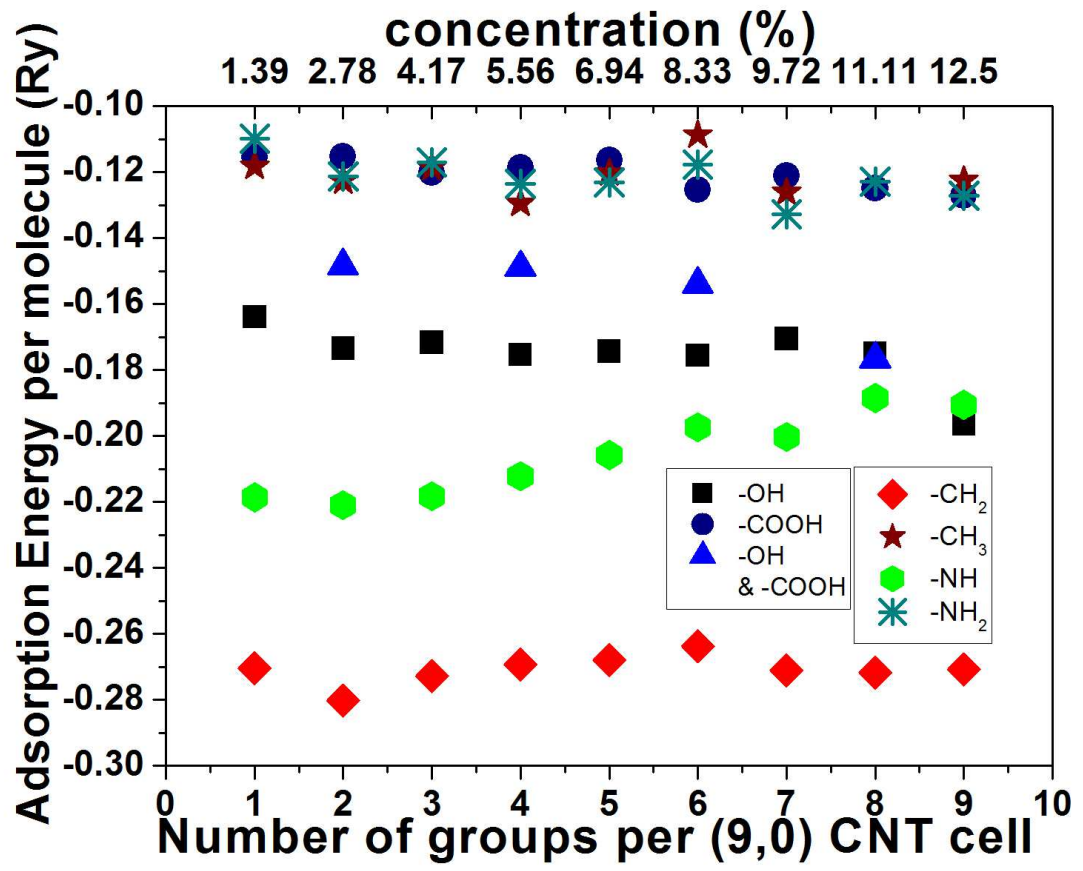

FIG. 2. (color online) Adsorption energy per molecule of (9,0) CNT functionalized with -NH, -NH$_2$, -CH$_2$, -CH$_3$, -COOH, -OH, -OH and -COOH groups as a function of number of covalently bound fragments to sidewall of tube. Number of groups (bottom axis) have been recalculated to percentage concentration (top axis).

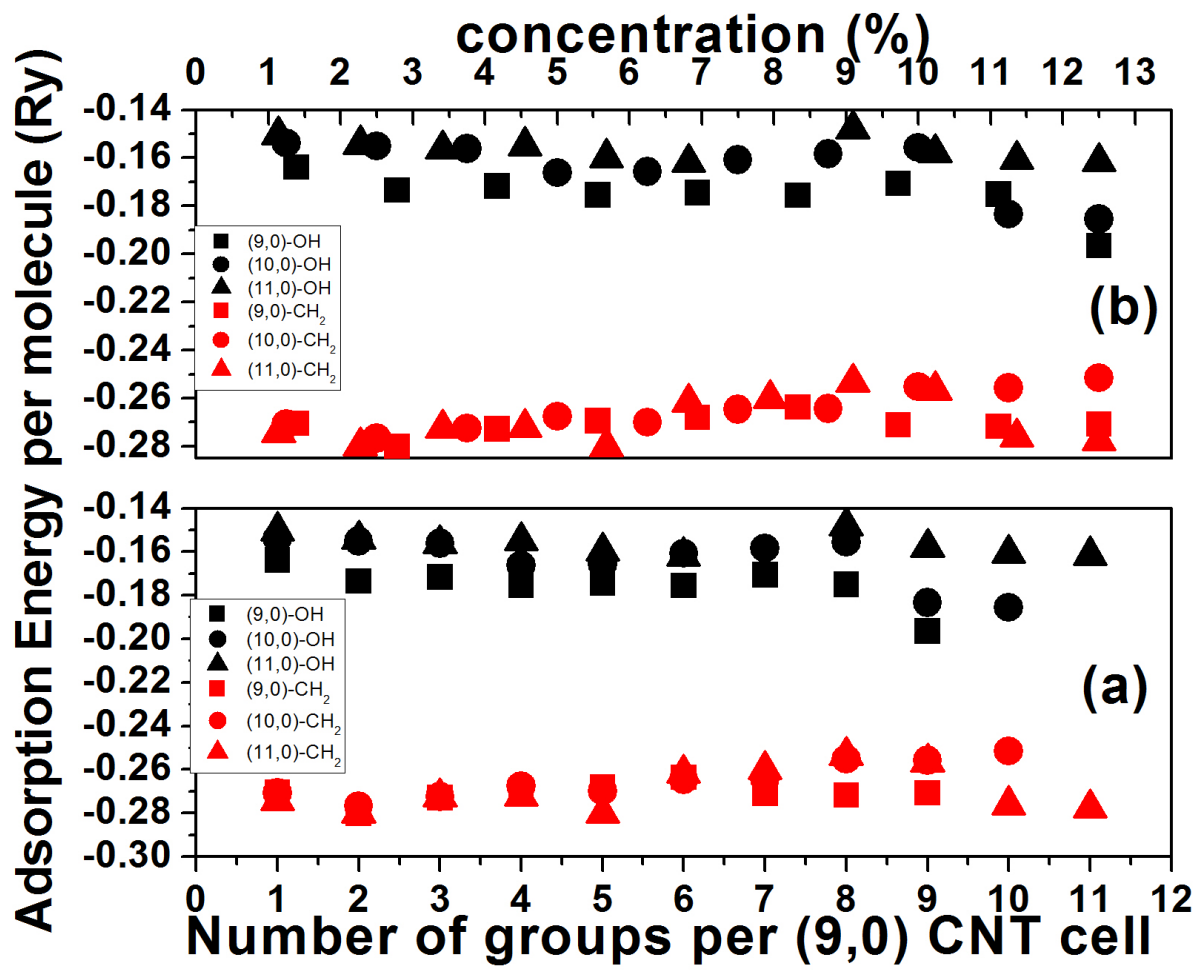

FIG. 3. (color online) Adsorption energy per molecule of (9,0), (10,0), (11,0) CNT functionalized with -CH$_2$ and -OH fragments as a function of density of attached molecules (a) and percentage concentration (b). Number of groups (bottom axis in (b)) have been recalculated to percentage concentration (top axis in (a)).

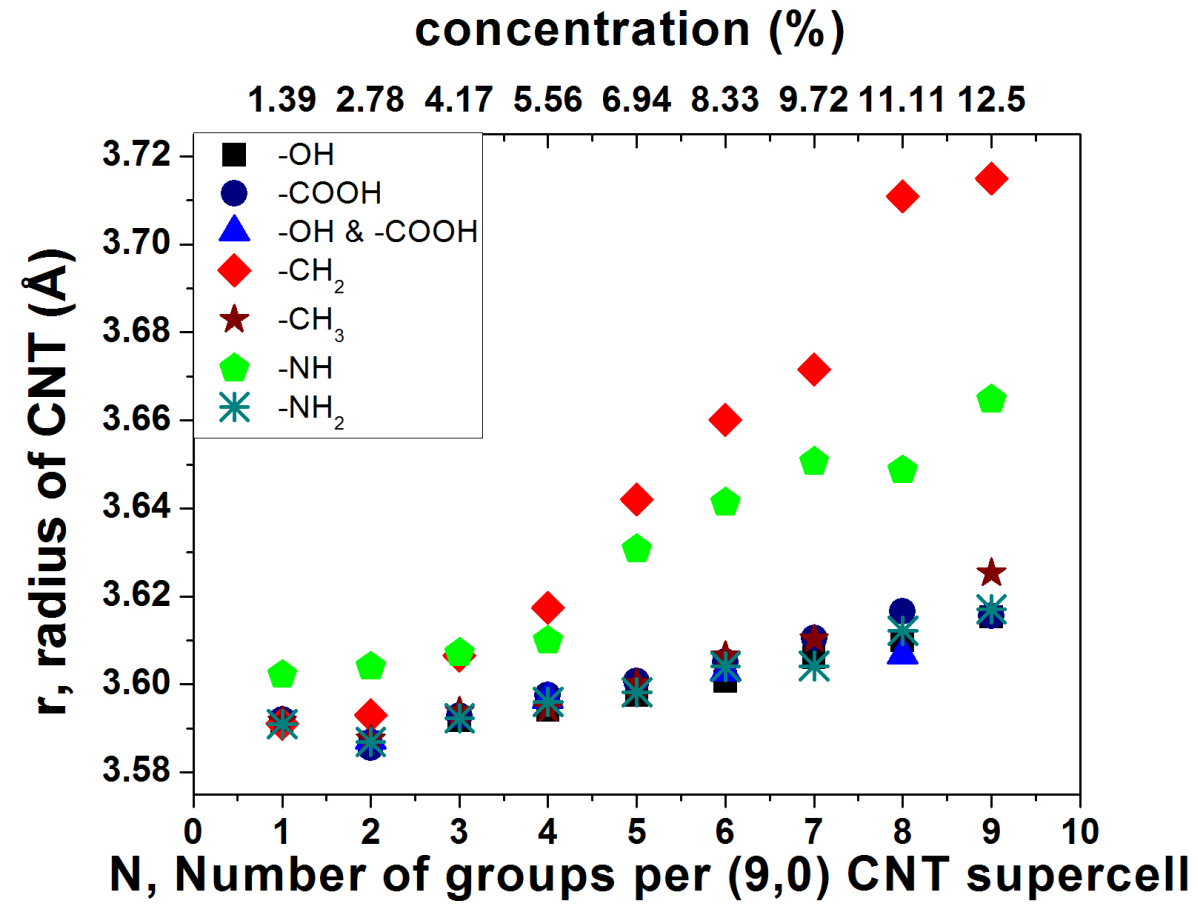

FIG. 4. (color online) Radius of (9,0) CNT functionalized with -NH, -NH$_2$, -CH$_2$, -CH$_3$, -COOH, -OH, -OH and -COOH groups as a function of number of covalently bound fragments to sidewall of tube. Number of groups (bottom axis) have been recalculated to percentage concentration (top axis). Radius of functionalized CNT is increasing with increasing number of attached fragments.

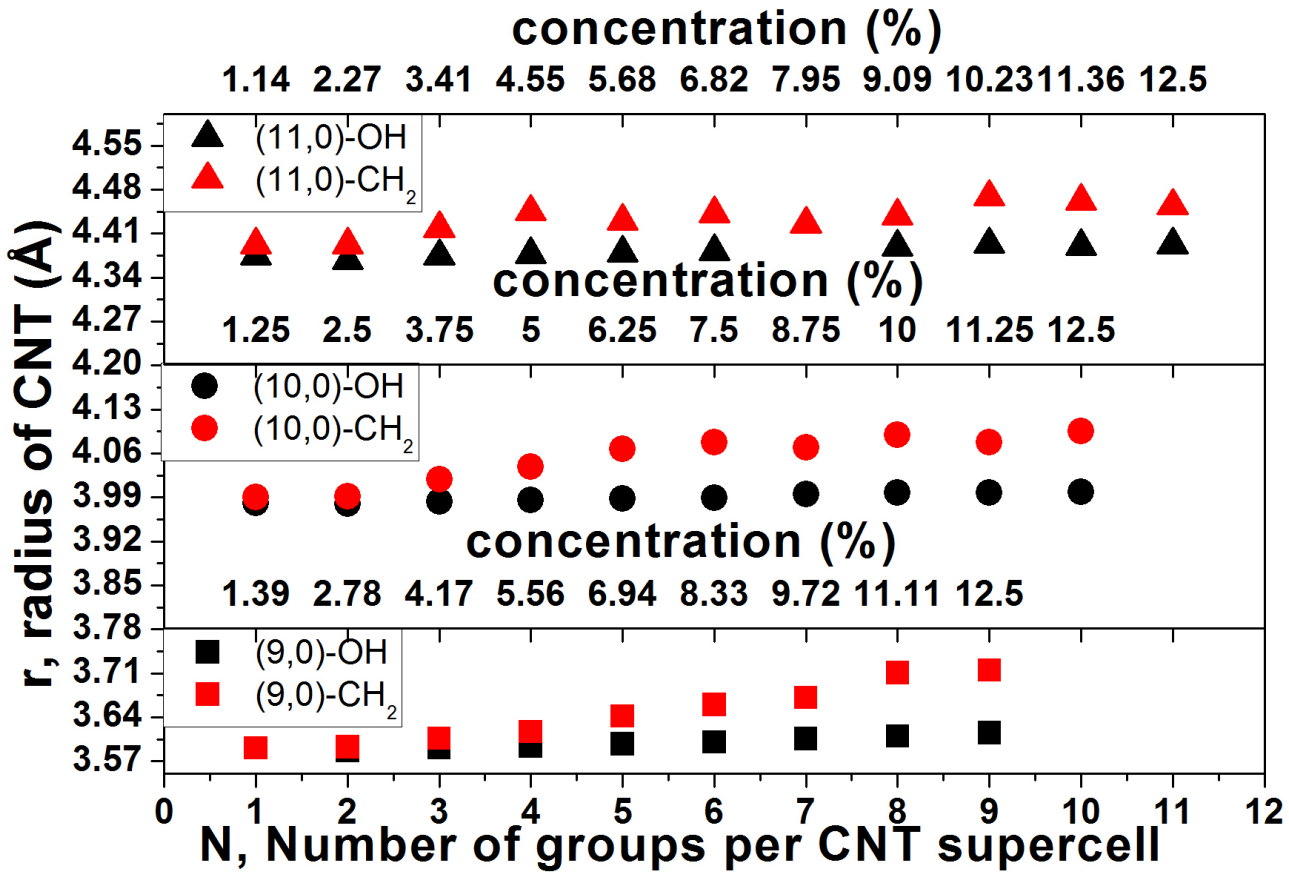

FIG. 5. (color online) Radius of (9,0), (10,0) and (11,0) CNT functionalized with -CH$_2$ and -OH as a function of number of attached fragments. Top axis with percentage concentration refers to (11,0) CNT, middle - (10,0) CNT, and bottom - (9,0) CNT.

As mentioned before, attaching -CH$_2$ radicals to the lateral surface of CNT causes strong deformations like 5-7 defects. Functionalization with -OH groups slightly changes the cross-section of CNT - from circle to ellipse. Therefore we have decided to compare (Fig. 5) both types of attachments for all of the CNT - (9,0), (10,0) and (11,0). We have noticed, for biggest considered concentration - 12.5%, that (9,0) CNT functionalized with -CH$_2$ shows the biggest percentage change (3.31%) of radius with comparision to (10,0) (2.83%) and (11,0) (1.81%) CNT. For -OH groups the same trend, but weaker percentage decrease is observed. The percentage changes are 0.64%, 0.43% and 0.39%, for (9,0), (10,0) and (11,0) CNT, respectively. Therefore, one can deduce that functionalization of bigger nanotubes has less influence on its structure than functionalization CNT with smaller diameter.

B. Elastic properties of pure CNT

For the purpose of comparison our calculations to previous works and to get the point of reference to functionalized case we have analyzed elastic properties of pure (9,0), (10,0) and (11,0) CNTs.

TABLE I. Elastic properties of (9,0), (10,0) and (11,0) CNTs.

Property	**(9,0)**	**(10,0)**	**(11,0)**
Y (TPa)	1.02	1.03	1.02
K (TPa)	0.61	0.57	0.54
G (TPa)	0.41	0.43	0.43
ν	0.22	0.20	0.18

Young's moduli, Shear moduli, Bulk moduli, and Poisson's ratios for (9,0), (10,0) and (11,0) CNTs are gathered in Tab.I. The calculated Young's moduli of the pure CNT compare excellently to experimental findings (0.32 TPa - 1.80 TPa)[2,17,23] and previous theoretical works (0.8 - 1.5 TPa)[2,18,21,22,24–29]. Calculated Poisson ratios are identical to the experimental ones and very close to theoretical predictions (0.19-0.34)[2,17,22,29,30], and theoretical and experimental values of the Shear modulus and Bulk modulus are 0.45 TPa-0.58 TPa[2,17,21–23,30] and 0.50 TPa - 0.78 TPa[2,17], respectively.

We have also checked dependence of all the elastic properties for wider range of zigzag CNTs. Only for small CNT, like (4,0) and (5,0) all the values are smaller. For bigger CNT, up to (20,0), the values are very similar tthose shown in Tab.I. From (6,0) CNT all of the elastic moduli become insensitive to diameter of CNT. This behaviour has been remarked for Young's modulus by[17,21,22,29–31] and for Shear modulus by[17,21,30].

C. Elastic properties of functionalized CNT

In this part we have performed study of elestic properties of functionalized CNT.

First of all we have analyzed Young's modulus of (9,0) CNT functionalized with -NH, -NH_2 , -CH_2, -CH_3, -COOH, -OH, -OH and -COOH groups (Fig. 6). For all of groups this quantity is decreasing with increasing density of attachments. However, for radicals, -CH_2 and -NH, trend is much more stronger then for other groups. CNT functionalized with 9 CH_2 (12.5 %) has reduced its structure by 28.41 %. Whereas CNT with 9 -CH_3 groups reduction in Young's modulus is equal 13.52 %. Changes in structure cause by functionalization, which have been just described in terms of CNT radius (Fig. 4), are also very well noticable in Young's modulus. Considering that similar dependence for armchair CNTs functionalized with -COOH was reported by Coto[13] this trend can be generalized for all of SWCNT.

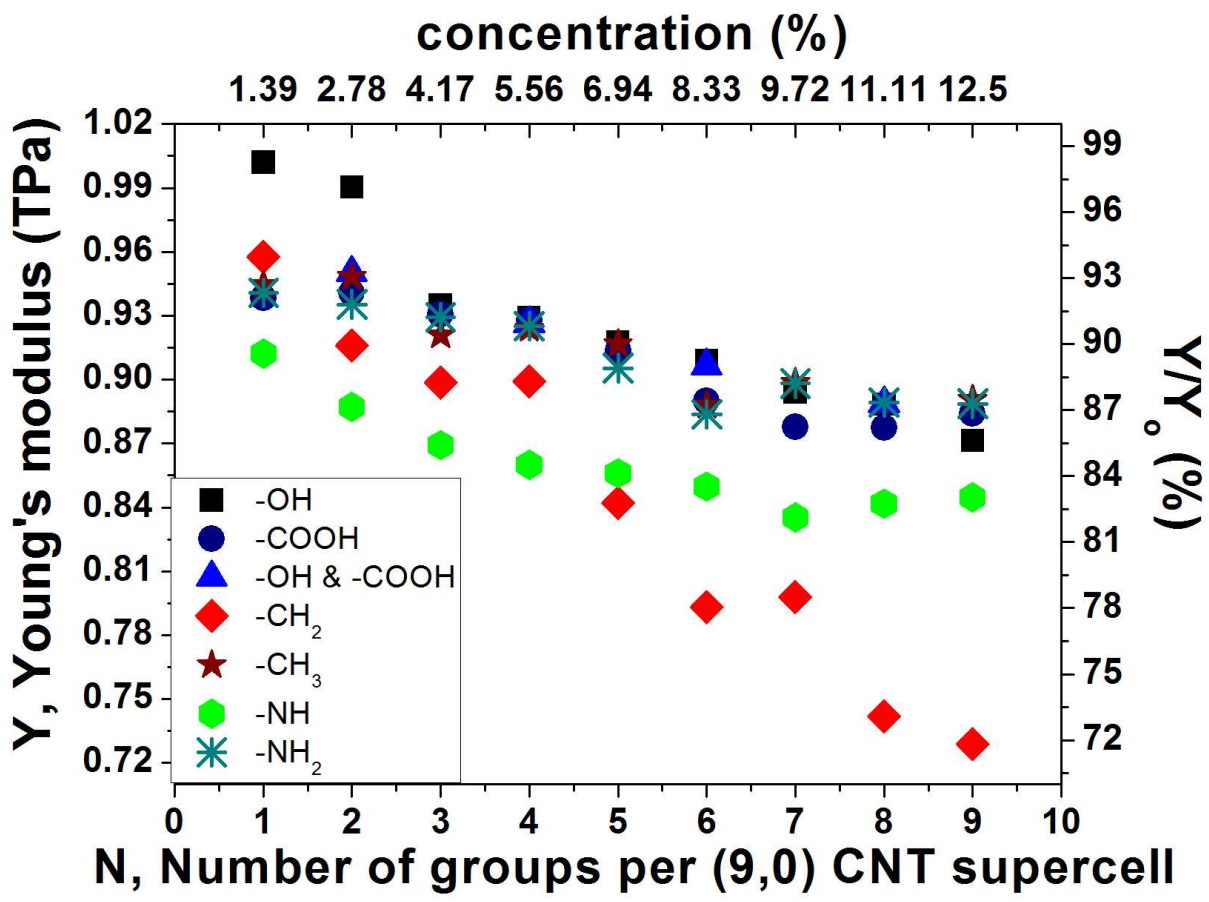

FIG. 6. (color online) The Young's modulus of (9,0) CNT functionalized with -NH, -NH_2 , -CH_2, -CH_3, -COOH, -OH, -OH and -COOH groups as a function of density of attached molecules. Number of fragments bound to CNT have been recalculated to percentage concentration (top axis). On the right axis we have depicted percentage change of Young's modulus due to increasing functionalization. Young's modulus is decreasing with increasing number of attached groups (concentration).

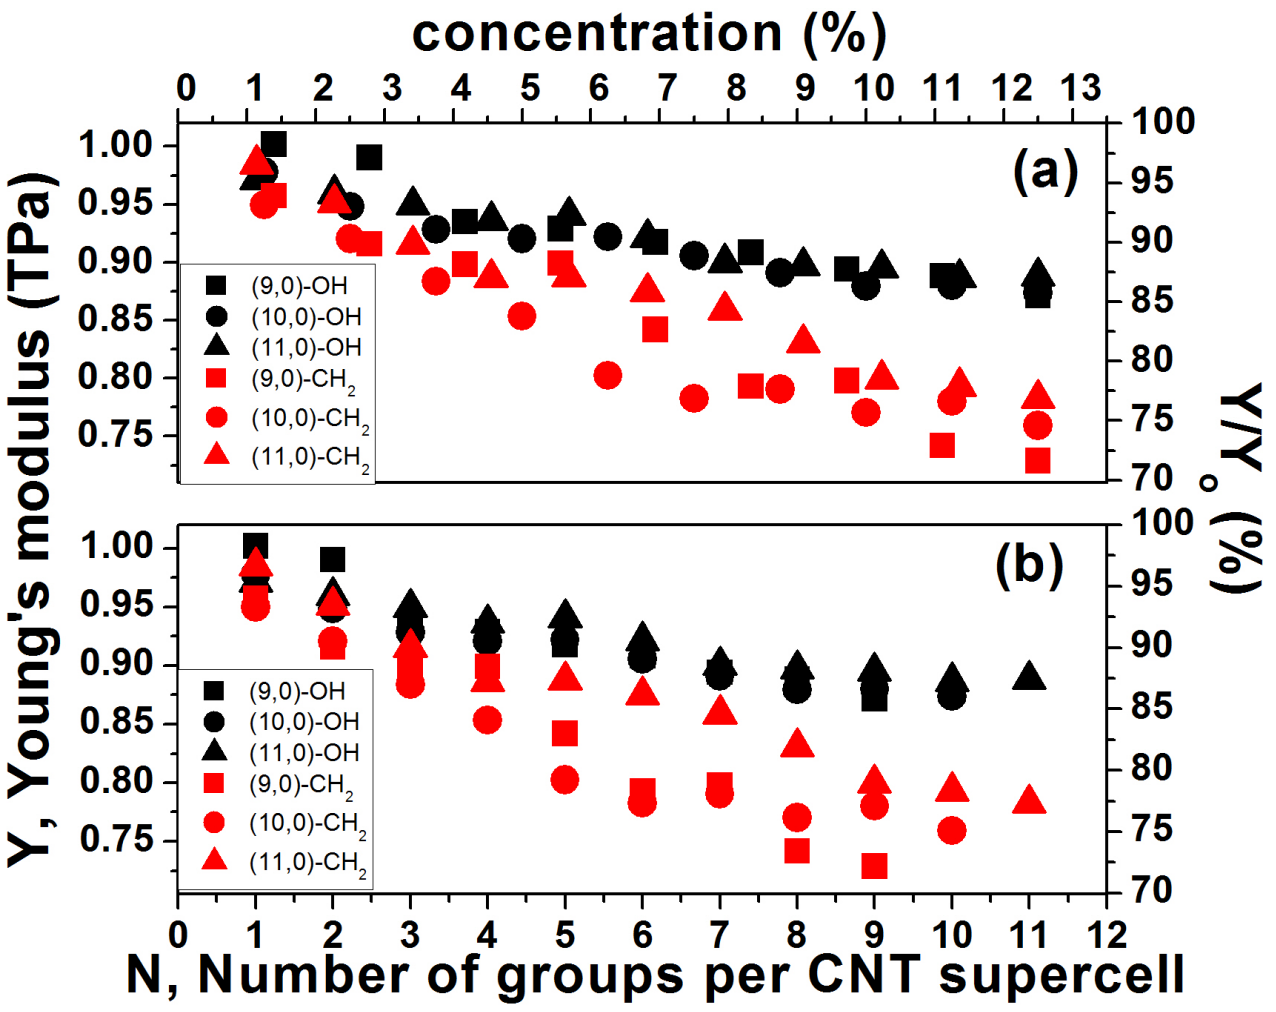

FIG. 7. (color online) The Young's modulus of (9,0), (10,0) and (11,0) CNT functionalized with -OH , and -CH_2 fragments as a function of density of attached molecules (a) and percentage concentration (b). Young's modulus is almost independent of diameter of the tube.

For the purpose of comparing how Young's modulus depends of diameter of the tubes we have chosen -OH groups and CH_2 fragments. In Fig. 7 we have plotted the dependence Young's modulus of (9,0), (10,0) and (11,0) CNT functionalized with -OH and -CH_2 on density . -OH groups represents behaviour of non-radical attachements which cause small deformation of CNT, and -CH_2 - radicals wich induce 5-7 defects and for bigger concentrations are able to destroy whole structure. It is clearly seen (Fig. 7a) that for -CH_2 Young's modulus is slightly dependent and for -OH we can not distinguish between tubes.

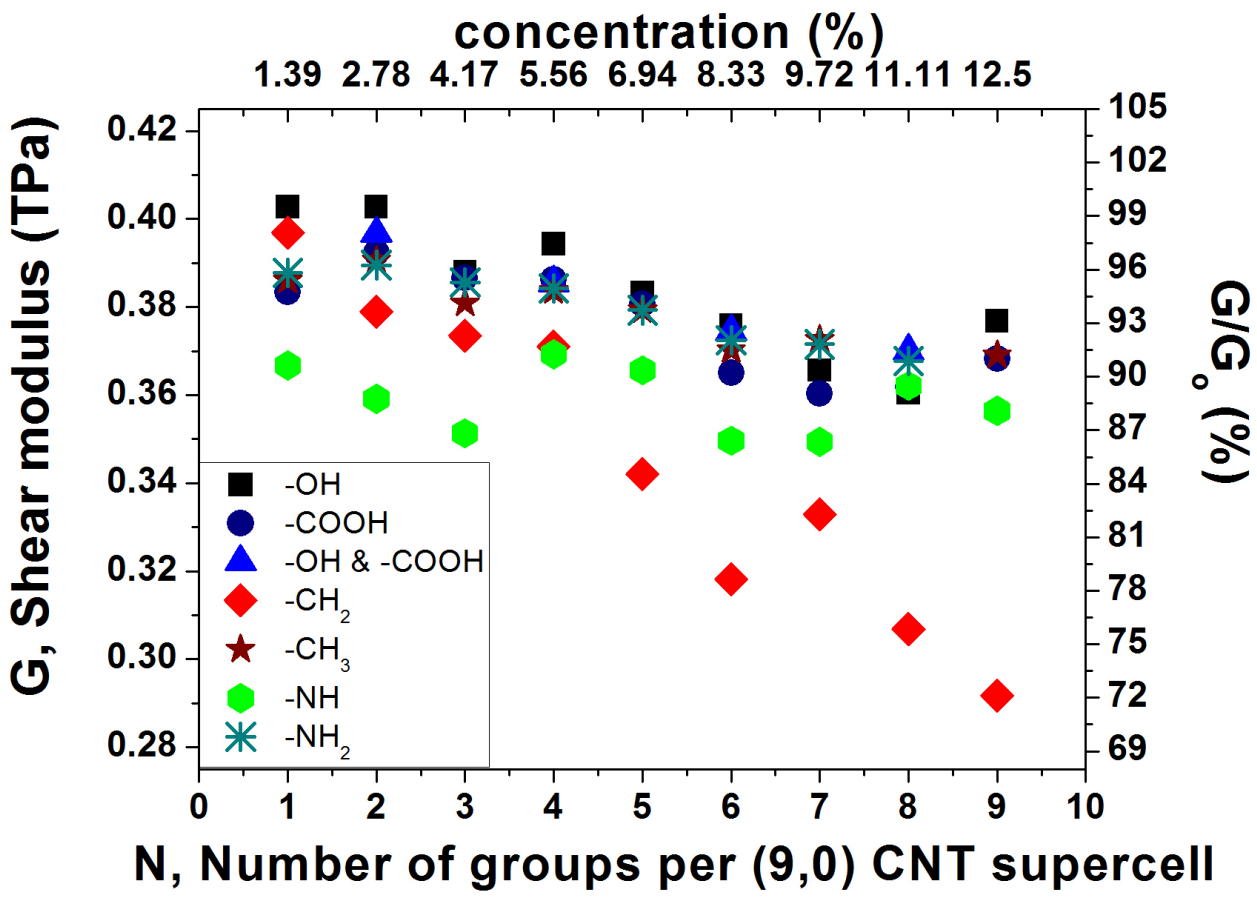

FIG. 8. (color online) The Shear modulus of (9,0) CNT functionalized with -NH, -NH$_2$, -CH$_2$, -CH$_3$, -COOH, -OH, -OH and -COOH groups as a function of density of attached molecules. Number of fragments bound to CNT have been recalculated to percentage concentration (top axis). On the right axis we have depicted percentage change of Shear modulus due to increasing functionalization. Shear modulus, like Young's modulus is decreasing with increasing number of attached groups (concentration).

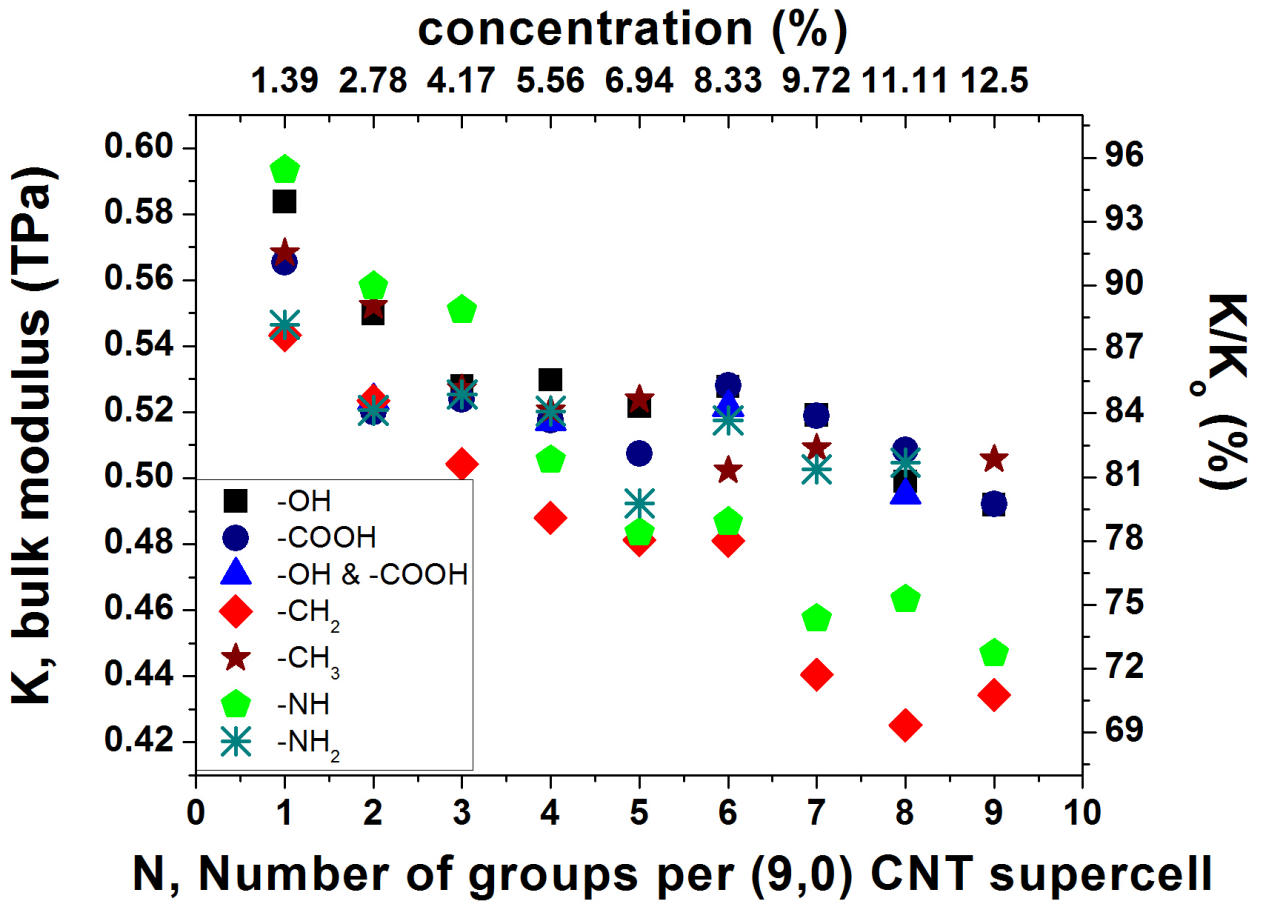

FIG. 9. (color online) The Bulk modulus of (9,0) CNT functionalized with -NH, -NH$_2$, -CH$_2$, -CH$_3$, -COOH, -OH, -OH and -COOH groups as a function of density of attached molecules. Number of fragments bound to CNT have been recalculated to percentage concentration (top axis). On the right axis we have depicted percentage change of Young's modulus due to increasing functionalization. Bulk modulus, like Bulk modulus and Shear modulus is decreasing with increasing number of attached groups (concentration).

Poisson ratio for structures functionalized by all of the fragments always oscilate between 0.17 and 0.24. This quantity, for this range of concentration, do not allow to distinguish among different types of attachments and CNTs. Hovewer Poisson ratio is necessity for calculating other elestic moduli.

Shear modulus has been plotted as a function of number and concentration of attached molecules (Fig. 8). Shear modulus drops slightly further, if one increases the density of the attached molecules, especially non-radicals, to the CNTs. For the -COOH groups in concentration less then 5.56 %(4 groups) we have noted excellent agreement with Zheng[32], shear modulus is very little change (less then 4.63 %).

Only for non-radical attachments in less then 10 % concentration, we have noted reduction in Shear modulus little higher then 10%. We have proved that Franklad's[33] prediction of negligible influence functionalization on shear modulus can not be generalized to all of simple attachemnets.

The last elastic moduli, which we have taken into consideration, is Bulk modulus. This modulus as function of number of attached molecules and pecentage concentration, likewise Young's and Shear moduli, is shown in Fig. 9. Functionalize CNTs repsonse to uniform pressure likewise to linear strain and to shearing strains. The percentage reduction in Bulk modulus for non-radical atachemnets is greater then in Shear and Young's modulus.

IV. CONCLUSIONS

We have performed extensive studies of the elastic properties of the various types of CNTs functionalized, up to 12.5 % concentration, with many molecular groups. We have analized the crucial elastic properties such as Young's modulus, Poisson ratio, Shear modulus and Bulk modulus.

We have shown by analyzing adsorption energy per molecule and radius of nanotube that functionalization to the lateral surface change the whole structure. Rehybridization of C-C bonds, deformation and defects have significant influence on elastic properties. Stronger covalent bond leads to larger CNT deformation, resulting in decreasing of Young's, Shear and Bulk modulus. The Bulk modulus of functionalized CNTs, in contrast to -CH$_2$ case, reveal the greatest percentage changes in comparision to pure CNT.

As far as Young's, Shear and Bulk modulus reflect changes in structure, the Poissons ratio remains almost unchanged. Those slight changes have no obvious tendency.

CNT covalently functionalized with small concentration non-radical groups could be reinforcement for composite materials. Functionalization with -COOH, -OH, -NH$_2$, -CH$_3$ do reduce all of the elastic moduli, but not to the extent that could disturb strong enforcement of the composite materials. The reduction is not too high - approximately 15 % in Young's modulus, 10 % in Shear modulus and 20% in Bulk modulus in comparision to pure CNTs. From the other hand they are indispensable to binding CNT to polymer matrix and significantly improve homogenous dispersion and integration of CNTs in polymers, reduce its tendency to reagglomeration. This feature substantialy enhence elastic properties of polymer matrices with CNTs, even more then functionalization spoil because of inducing changes in tube's structure resulting reduction in elastic moduli. This effect regarding to Young's modulus has been already experimentaly observed[6,7,34] for amines,[5] amides, and carboxylic groups[4,6]. But for CNT with hydroxyl groups dispersed into polymer matrix Wang[35] reported reduction in Young's modulus in comparition to pure matrix.

Taking into account all of the possible applications, not only nano-composites, we can conclude that influence of functionalization on elastic properties of those structure can not be neglected.

V. ACKNOWLEDGMENTS

The authors gratefully acknowledge financial support of the Polish Council for Science through the Development Grants for the years 2008-2011 (NR. 15-0011-04/2008, NR. KB/72/13447/IT1-B/U/08).

---

[1] S. Iijima, Nature **354**, 56 (1991).

[2] M. Terrones, Annu. Rev. Mater. Res. **33**, 419 (2003).

[3] W. A. Goddard, D. W. Brenner, S. E. Lyshevski, and G. J. Iafrate, *Handbook of Nanoscience, Engineering, and Technology (Electrical Engineering Handbook)* (CRC Press LLC, 2003).

[4] I. T. Amr, A. Al-Amer, S. T. P, S. A. G. M. Al-Harthti, R. Sougrat, and M. A. Atieh, Composites: Part B **42**, 1554 (2011).

[5] S. Steiner, S. Busato, and P. Ermanni, Carbon **50**, 1713 (2012).

[6] N. Lachman and H. D. Wagner, Composites: Part A **41**, 1093 (2010).

[7] F. H. Gojny, M. H. G. Wichmann, B. Fiedler, and K. Schulte, Composites Science and Technology **65**, 2300 (2005).

[8] K. Z. Milowska, M. Birowska, and J. A. Majewski, Acta Physica Polonica A **116**, 841 (2009).

[9] K. Milowska, M. Birowska, and J. A. Majewski, AIP Conf. Proc. **1399**, 827 (2011).

[10] K. Milowska, M. Birowska, and J. A. Majewski, Diamond and Related Materials **23**, 167 (2012).

[11] P. Hohenberg and W. Kohn, Phys. Rev. **136**, 864 (1964).

[12] W. Kohn and L. J. Sham, Phys. Rev. **140**, A1133 (1965).

[13] B. C. I. Antia, M. Blanco, I. M. de Arenaza, E. Meaurio, J. Barriga, and J.-R. Sarasua, Computational Material Science **50**, 3417 (2011).

[14] J. P. Perdew, K. Burke, and M. Ernzerhof, Phys. Rev. Lett. **77**, 3865 (1996).

[15] P. Ordejon, E. Artacho, and J. M. Soler, PRB (Rapid Comm.) **53**, R10441 (1996).

[16] J. M. Soler, E. Artacho, J. D. Gale, A. Garcia, J. Junquera, P. Ordejon, and D. Sanchez-Portal, J. Phys.: Condens. Matter **14**, 2745 (2002).

[17] J. P. Lu, Phys. Rev. Lett. **79**, 1297 (1997).

[18] E. Hernandez, C. Goze, P. Bernier, and A. Rubio, Phys. Rev. Lett. **80**, 4502 (1998).

[19] D. Sanchez-Portal, E. Artacho, J. M. Soler, A. Rubio, and P. Ordejon, Phys. Rev. B. **59**, 12678 (1998).

[20] V. M. Harik, Comput. Mater. Science **24**, 328 (2002).

[21] C. Li and T.-W. Chou, International Journal of Solids and Structures **40**, 2487 (2003).

[22] T. Chang, J. Geng, and X. Guo, , Proc. R. Soc A **462**, 2523 (2006).

[23] A. Krishnan, E. Dujardin, T. W. Ebbesen, P. N. Yianilos, and M. M. J. Treacy, PRB **58**, 14013 (1998).

[24] G. V. Lier, C. V. Alsenoy, V. V. Doren, and P. Geerlings, Chem. Phys. Lett. **326**, 181 (2000).

[25] S. Govindjee and J. L. Sackman, Solid State Communications **110**, 227 (1999).

[26] N. Yao and V. Lordi, J. App. Phys. **84**, 1939 (1998).

[27] Z. Xin, Z. Jianjun, and O.-Y. Zhong-can, PRB **62**, 13692 (2000).

[28] K. N. Kudin and G. E. Scuseria, PRB **64**, 235406 (2001).

[29] D. Sanchez-Portal, E. Artacho, and J. M. Soler, PRB **59**, 12678 (1999).

[30] V. Popov, V. E. V. Doren, and M. Balkanski, PRB **61**, 3078 (1998).

[31] M. M. Shokrieh and R. Rafiee, Materials and Design **31**, 790 (2010).

[32] Q. Zheng, D. Xia, Q. Xue, K. Yan, X. Gao, and Q. Li, J. Phys. Chem. B **106**, 3046 (2009).

[33] S. J. V. Frankland, A. Caglar, D. W. Brenner, and M. Griebel, J. Phys. Chem. B **106**, 3046 (2002).

[34] T. L. B. W. C. Z. S. Wang, Z. Liang, Nanotechnology **17**, 1551 (2006).

[35] C. Wang, X. Chen, H. Xie, and R. Cheng, Composites: Part A **42**, 1620 (2011).